


Exhaust fans EA series

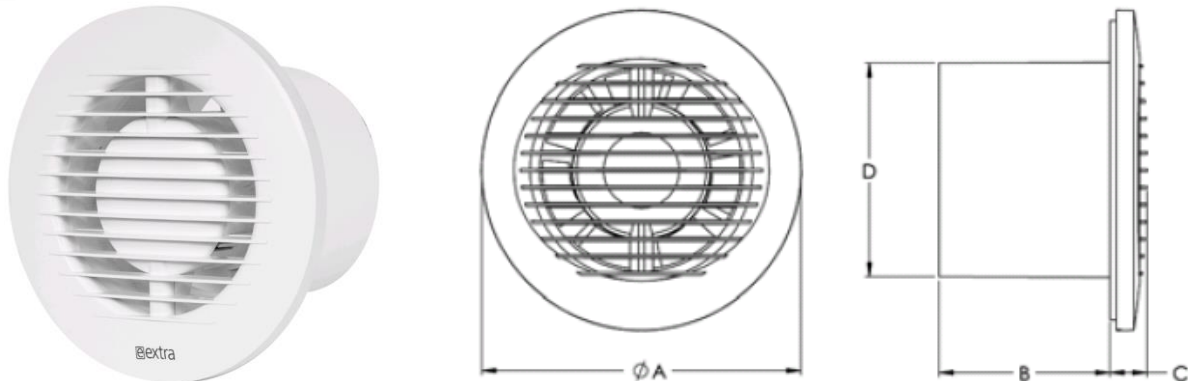

Description

Metal ventilation grilles MR for supply and exhaust ventilation.

Construction	Manufactured from plastic Fan: axial Type of bearing: ball bearing Motor protection class: IPX4 Insulation class: class B
Installation	Mounting with all type round ducts: sheet metal, flexible aluminium, plastic or fabric Mounting positions: multiple Location: indoors
Sizes	100, 125, 150 mm




Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]
EA100	148	80	16	99
EA125	173	80	16	124
EA150	198	80	16	149

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m3/h]	Noise level at 1m [dB(A)]	Temperature min/max [°C]	Weight [kg]
EA100	230V-50Hz	15	IPX4	2550	100	32	+5/+40	0,37
EA125	230V-50Hz	16	IPX4	2360	150	36	+5/+40	0,44
EA150	230V-50Hz	20	IPX4	2100	200	40	+5/+40	0,56

Exhaust fans EA series

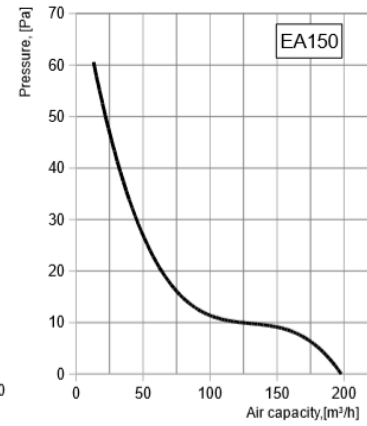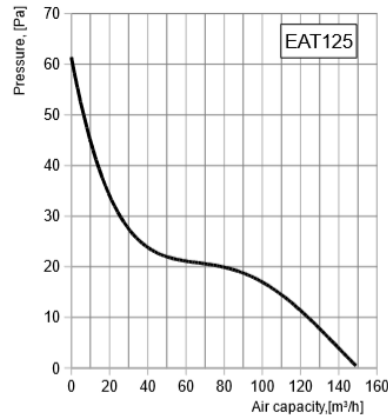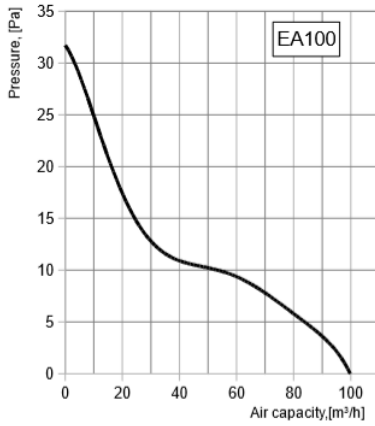

Modifications

EAXXT - fan is equipped with a timer function

EAXXHT - fan is equipped with a humidity level control function