


Ventilation kit with thermostat SPKT

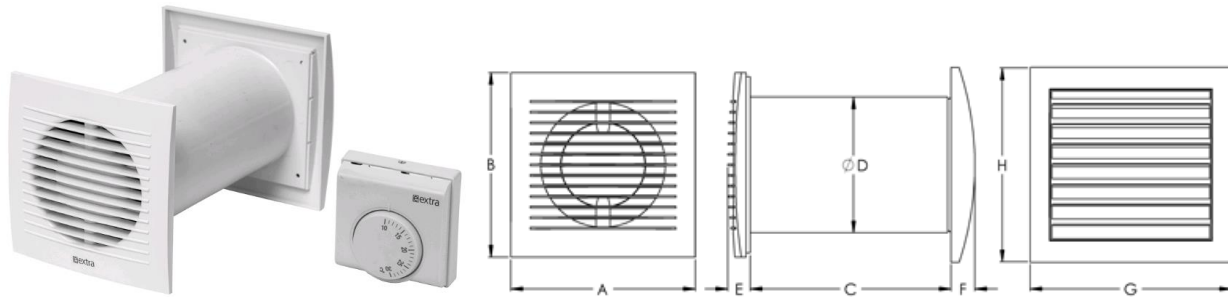

Description

Ventilation kit with thermostat SPKT is used for moving hot air to adjoining room or outside.

Construction	Fan: axial Type of bearing: ball bearing Thermostat Back draft shutter Circular duct plastic Ventilation grille plastic
Installation	Mounting positions: multiple Location: indoors
Temperature range	5°C to + 40°C
Sizes	100, 125 mm

Dimensions

Type	A [mm]	B [mm]	C [mm]	ØD [mm]	E [mm]	F [mm]	H [mm]	G [mm]
SPKT100	140	140	200	103	17	18	147	153
SPKT125	165	165	200	128	17	18	190	190

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m ³ /h]	Noise level at 3m [dB(A)]	Temperature min/max [°C]	Weight [kg]
SPKT100	230V-50Hz	7	IP24	2000	65	26	+5/+40	0,74
SPKT125	230V-50Hz	10	IP24	1500	105	30	+5/+40	0,90

